


SPECIFICATIONS						
	MAX LOAD	DIM "A" COLLAPSED	DIM "A" EXTENDED	STROKE	OIL CAPACITY	WEIGHT
HCL2002	1985 KN/ 223 TON	238 [9.37]	288 [11.34]	50 [1.97]	1,418 CM ³ [86.51 IN ³]	85 KG [188 LBS]
HCL2004		288 [11.34]	388 [15.28]	100 [3.94]	2,835 CM ³ [173.02 IN ³]	105 KG [231 LBS]
HCL2006		338 [13.31]	488 [19.21]	150 [5.91]	4,253 CM ³ [259.53 IN ³]	124 KG [273 LBS]
HCL2008		388 [15.28]	588 [23.15]	200 [7.87]	5,671 CM ³ [346.04 IN ³]	143 KG [316 LBS]
HCL20010		438 [17.24]	688 [27.09]	250 [9.84]	7,088 CM ³ [432.55 IN ³]	163 KG [358 LBS]
HCL20012		488 [19.21]	788 [31.02]	300 [11.81]	8,506 CM ³ [519.06 IN ³]	182 KG [401 LBS]
MAX PRESSURE - 700 BAR/10,150 PSI						

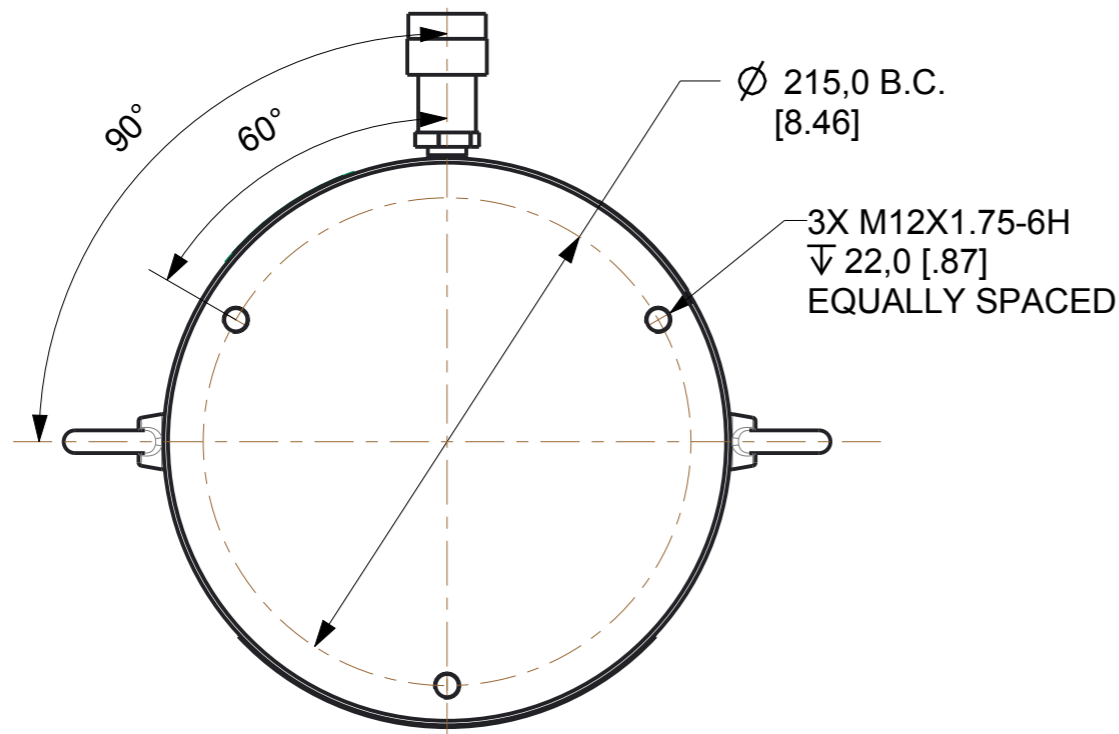

Language Code - Primary/Secondary eng/	Document Type: ID DRAWING	Description: ID SPEC HCL200			
THIRD ANGLE PROJECTION	Technical Reference: Juan Carlos Gomez	Rev A	Date of Issue 2016DEC12	HCL200ID	Sheet 1/1
DO NOT SCALE DRAWING	Approver: Steve Held				
Per ASME Y14.5 - 2009	Creator: John Van Roy	ENERPAC			