



▼ ETT400 Turntable

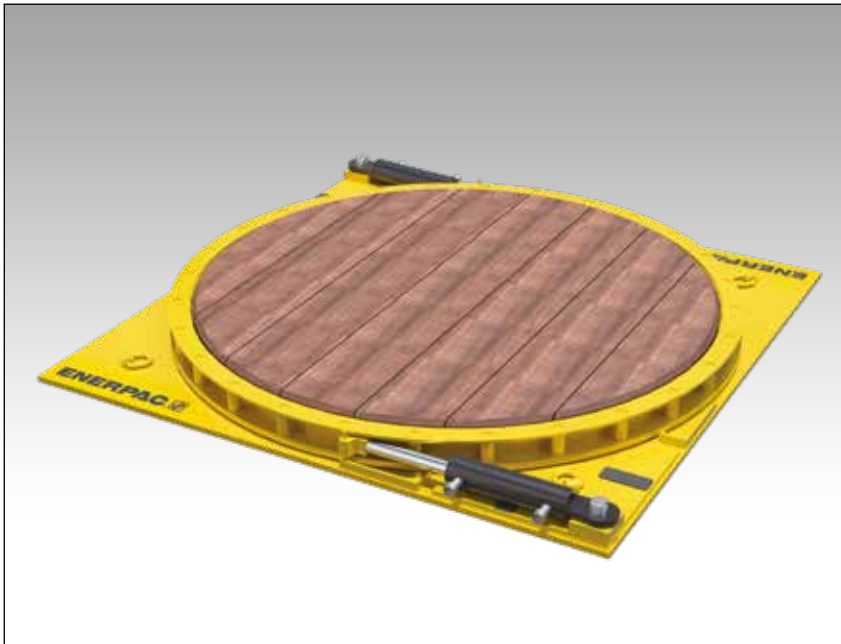

- Safe and controlled rotation of heavy loads
- Easily change rotation direction
- Dual capacity: 200 ton with one cylinder, 400 ton with two cylinders
- Compact size for use in applications with limited space
- Compatible with standard Enerpac pumps
- Hardwood surface.

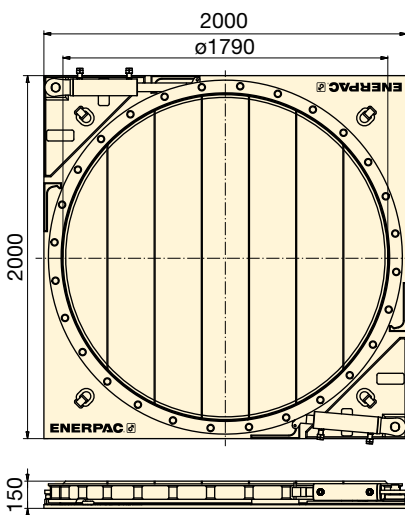

▼ SELECTION CHART

Maximum Load Capacity (kN)	Model Number	Cylinder Capacity * (kN)	Cylinder Oil Capacity * (cm <sup>3</sup> )		No. of Cylinders *	Rotation per Stroke (degrees)	Platform Diameter (mm)	(kg)
			advance	retract				
2000	<b>ETT200</b>	222	792	344	1	12,5	1790	1700
4000	<b>ETT400</b>	222	792	344	2	12,5	1790	1725

\* Per cylinder. Cylinder modelnumber: **BRD259-ETT**

## ETT Series

Maximum Capacity:  
**200 - 400 ton**

Cylinder Capacity:  
**25 ton (222 kN)**

Maximum Operating Pressure:  
**700 bar**



### Safe and controlled rotation

The ETT-Series is your solution for rotating heavy loads during, before or after a lifting and skidding operation.



### SFP-Series, Split-Flow Pump

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Page: **336**



### LH-Series, Low-Height Skidding

The ETT-Series are ideal in combination with our skidding systems, particular the LH-Series. Skidding and rotating in confined spaces is simplified.

Page: **358**



### Telescopic Hydraulic Gantries

The ETT-Series in combination with our hydraulic gantry SL-Series makes load handling in the most demanding situations easy.

Page: **356**